


Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

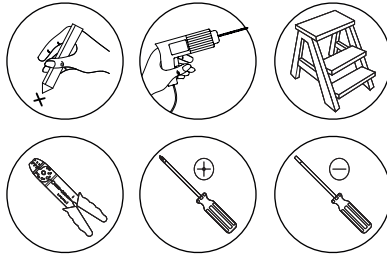

MINI DOWNLIGHT RECESSED SPOT S204

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Material:** Aluminium
- **Lamp Type:** LED | 5W | 3V | 1150mA | 3000K | 380Lm | CRI 90
- **Ingress Protection:** IP20 Protection against entry of solid objects greater than 12mm in diameter.


INSTALLATION INSTRUCTIONS

- ⚠ Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is switched off.
- Cutting hole Ø: 3cm on the ceiling.
Depth required 9.5cm.
- Connect the input end of the driver with the power line, then pull up the clips and put the whole lighting fixture into the pre-open hole.
Suggested On-Off Driver (D-EG-5 pass from the hole).
Suggested DALI Driver (LCM-40 remote application).
- Reconnect power.

WARNING

- ⚠ Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire with thermally insulating material. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

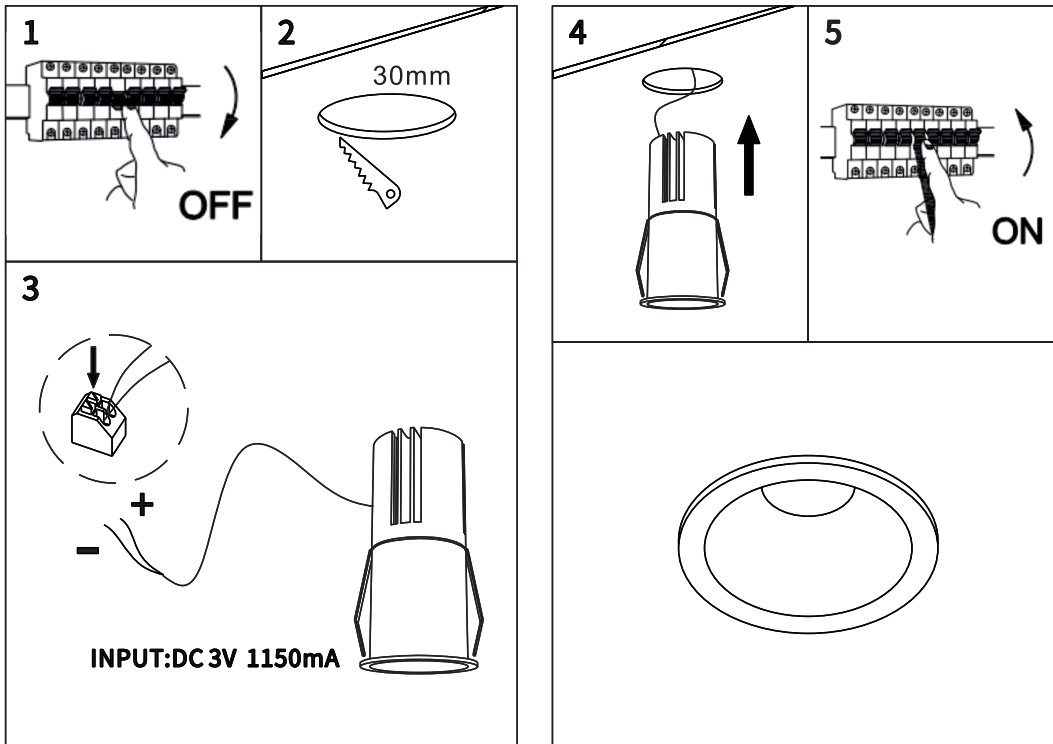

LED

CRI 90

IP 20

0.5m

