


Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

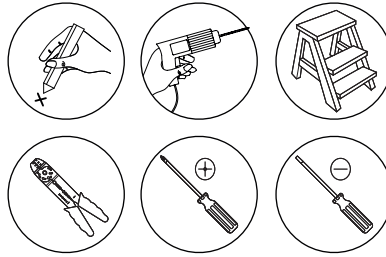

INDOOR CEILING SPOT

S217

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Material:** Aluminium | Acrylic
- **Lamp Type:** LED | 5W | 220V | 200mA | 3000K | 380Lm | CRI 90
- **Ingress Protection:** IP20 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

- ⚠ Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is switched off.
- Insert the mounting anchors on the mounting surface.
- Fit the mounting base onto the mounting surface with the screws.
- Connect the input end of the driver with the power line, then fit the lighting fixture onto the mounting surface.
- On-Off Driver 200mA included.
- Suggested DALI Driver (D-EG-5 remote application).
- Screw and fit the lighting fixture onto the mounting base.
- Reconnect power.

WARNING

- ⚠ Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire.
- Do not exceed the maximum wattage rating of the lamp.
- If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

